

EVOLINE® FrameDock






A flexible modular system for various applications.



EVoline[®] FrameDock

EVoline FrameDock is a flush fitting system which can be installed horizontally or vertically - be it on a desk, a kitchen worktop, a wall, or a side of a piece of furniture. It can be mounted almost everywhere due to its low mounting depth of 51 mm and installation from the top:

High quality design, customisable components and yet discreet.

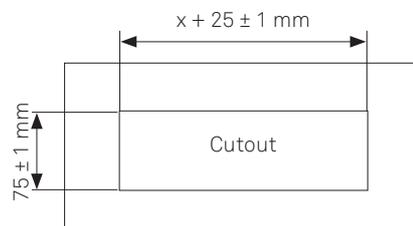
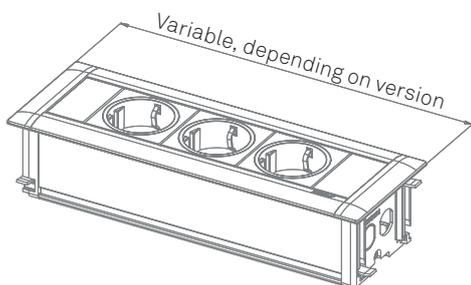


Beispiele zur Stromversorgungsgeometrie Docks:


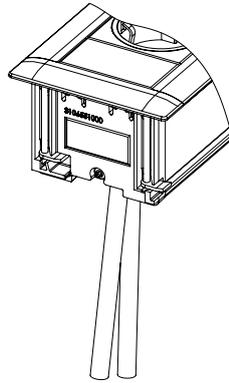
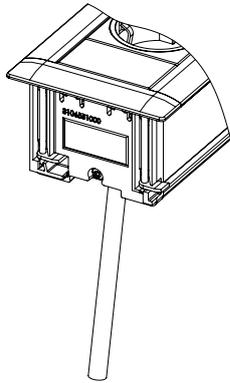


Fixed Power Supply Cable through the bottom of the profile

Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector



End cap with power input or output connector, depending on the surface thickness (max. 18 mm)

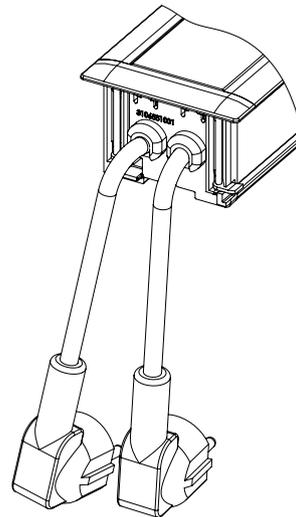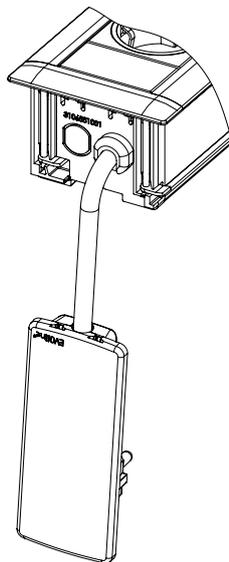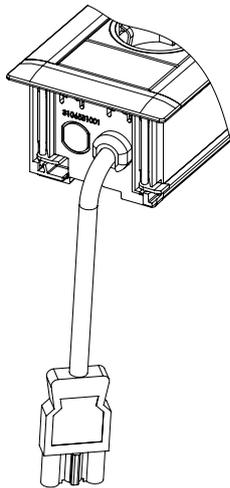

End cap with fixed power supply cable, depending on the surface thickness (max. 18 mm)

Available with several country specific plugs, EVOLine Plug, wire end ferrules, GST 18- or WAGO WINSTA connector.

Description	Picture	Specifications	Order Number
<p>EVoline FrameDock SMALL</p> <p>Aluminium housing, silver anodised, for surface thickness up to 38 mm. 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Powersupply cable entry left side in the bottom of the profile.</p>		<p>Profile silver anodised Screw covers black plastic</p> <p>Profile black Screw covers black plastic</p> <p>Profile white Screw covers white plastic</p>	<p>1596 1000 0900</p> <p>1596 1001 9500</p> <p>1596 1001 7900</p>
<p>EVoline FrameDock DATA SMALL</p> <p>Aluminium housing, silver anodised, for surface thickness up to 38 mm. 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power and data cable entry in the bottom of the profile.</p>		<p>Profile silver anodised Screw covers black plastic</p> <p>Profile black Screw covers black plastic</p> <p>Profile white Screw covers white plastic</p>	<p>1596 1000 1000</p> <p>1596 1001 9600</p> <p>1596 1001 8000</p>

Configuration examples



Description	Picture	Specifications	Order Number
<p>Empty Housing FrameDock</p> <p>For surface thickness up to 38 mm</p>		<p>Profile silver anodised Screw covers black plastic</p>	<p>9331 2180 0000</p>
		<p>Profile Silver anodised; Screw covers silver lacquered plastic</p>	<p>9331 2550 0000</p>
		<p>Profile black anodised Screw covers black plastic</p>	<p>9331 5330 0000</p>
		<p>Profile white powder-coated Screw covers white plastic</p>	<p>9331 3540 0000</p>

EVOLine® Interchangeable Modules FrameDock

Simple and quick exchange of modules. Customisable with interchangeable modules.



The FrameDock can be individually equipped with power, data and multimedia modules.

For further requirements at the workspace, data and multimedia connections and cables are exchangeable without removing the FrameDock.

In the chapter „Interchangeable Modules“ (p.122) you can find the right modules for your personal FrameDock, usable as well in FlipTop *Push* or Dock Square.

